

Bracket Selector Guide for ElectroShades®

Group A ShadeCloths (0900, 1000, 1300, 3000, and 5400 Series) .030" Thick, average 1.05 lbs. per sq. yd.


	Width	84"	96"	108"	120"	126"	132"	144"	156"	168"	180"	192"	204"	216"	228"	240"
H	72"		1													
	84"		1													
	96"		1													
	108"		1													
E	120"			2												
	126"			2												
	132"			2												
I	144"															
	156"															
	168"															
	180"															
G	192"															
	204"															
	216"			3												
	228"			3												
H	240"															
	252"															
	264"															
T	276"															
	288"															
	300"			4												

BRACKET SELECTION KEY


1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

BRACKET DIMENSION KEY


For additional information regarding bracket selection, see Section 10: Engineering Standards.




A.
ELECTRO/1
DRIVE-END BRACKET




B.
ELECTRO/1 EXTENDED
DRIVE-END BRACKET




C.
ELECTRO/2
DRIVE-END BRACKET




D.
ELECTRO/2 EXTENDED
DRIVE-END BRACKET



E.
ELECTRO/3
DRIVE-END BRACKET



F.
ELECTRO/3 POCKET
DRIVE-END BRACKET



G.
ELECTRO/3 EXTENDED
DRIVE-END BRACKET

MechoShade Systems, Inc.
42-03 35th Street, Long Island City, NY 11101
Telephone: 718-729-2020
Fax: 718-729-2941 / 800-899-8081

E-mail: info@mechoshade.com
Internet Web Site: www.mechoshade.com

Bracket Selector Guide for ElectroShades®

Group B ShadeCloths (1600 and 2100 Series) .030" thick, average .95 lbs. per sq. yd.








Width	84"	96"	108"	120"	126"	132"	144"	156"	168"	180"	192"	204"	216"	228"	240"
H	1														
E				2											
I															
G															
H															7
T															

BRACKET SELECTION KEY

1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

BRACKET DIMENSION KEY

For additional information regarding bracket selection, see Section 10: Engineering Standards.

	A.	ELECTRO/1 DRIVE-END BRACKET		B.	ELECTRO/1 EXTENDED DRIVE-END BRACKET		C.	ELECTRO/2 DRIVE-END BRACKET		D.	ELECTRO/2 EXTENDED DRIVE-END BRACKET		E.	ELECTRO/3 DRIVE-END BRACKET		F.	ELECTRO/3 POCKET DRIVE-END BRACKET		G.	ELECTRO/3 EXTENDED DRIVE-END BRACKET
---	-----------	--	---	-----------	---	---	-----------	--	---	-----------	---	---	-----------	--	---	-----------	---	---	-----------	---


MechoShade Systems, Inc.
42-03 35th Street, Long Island City, NY 11101
Telephone: 718-729-2020
Fax: 718-729-2941 / 800-899-8081

E-mail: info@mechoshade.com
Internet Web Site: www.mechoshade.com

Group C ShadeCloths (1800 and 5500 Series) .030" thick, average .8465 lbs. per sq. yd


BRACKET SELECTION KEY	
1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

For additional information regarding bracket selection, see Section 10: Engineering Standards.



W

**ELECTRO/3
DRIVE-END BRACKET**



G

**ELECTRO/3 EXTENDED
DRIVE-END BRACKET**

3.11 MS2200 - 01/01/08

Bracket Selector Guide for ElectroShades®

Group D ShadeCloths (5100, 5200, 5300, 6000 and 6300 Series) .024" thick, average .9 lbs. per sq. yd.


Width	84"	96"	108"	120"	126"	132"	144"	156"	168"	180"	192"	204"	216"	228"	240"
H	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
E	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
I	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
G	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
H	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
T	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
300"	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

BRACKET SELECTION KEY


1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

BRACKET DIMENSION KEY


For additional information regarding bracket selection, see Section 10: Engineering Standards.




A. ELECTRO/1
DRIVE-END BRACKET




B. ELECTRO/1 EXTENDED
DRIVE-END BRACKET




C. ELECTRO/2
DRIVE-END BRACKET




D. ELECTRO/2 EXTENDED
DRIVE-END BRACKET



E. ELECTRO/3
DRIVE-END BRACKET



F. ELECTRO/3 POCKET
DRIVE-END BRACKET



G. ELECTRO/3 EXTENDED
DRIVE-END BRACKET


MechoShade Systems, Inc.
42-03 35th Street, Long Island City, NY 11101
Telephone: 718-729-2020
Fax: 718-729-2941 / 800-899-8081

E-mail: info@mechoshade.com
Internet Web Site: www.mechoshade.com

Group E ShadeCloths (0900 Series) .016" thick, average .875 lbs. per sq. yd.

BRACKET SELECTION KEY	
1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

For additional information regarding bracket selection, see Section 10: Engineering Standards.

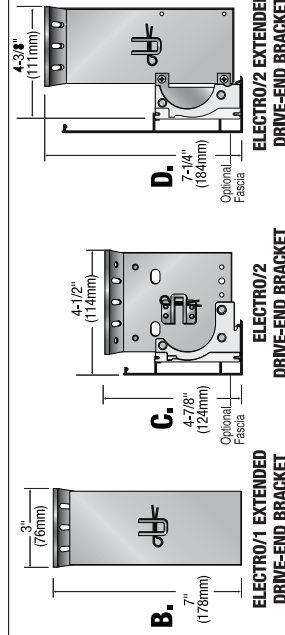

E-mail: info@mechoshade.com
Internet Web Site: www.mechoshade.com



Bracket Selector Guide for ElectroShades®

Group F ShadeCloths (0100 Series) .0216" thick, average .793 lbs. per sq. yd.


[illegible]

BRACKET SELECTION KEY


1	Accepts all Electro/3 Brackets with/without Fascia. See Illustration: E, F, G
2	Accepts Electro/3 Extended Brackets with Fascia. See Illustration: G
3	Accepts Electro/3 Pocket Bracket See Illustration: F
4	Accepts Electro/3 Extended Bracket without Fascia. See Illustration: G
5	Accepts all Electro/1 & Electro/2 Brackets with/without Fascia. See Illustration: A, B, C, D
6	Accepts Electro/1 Extended & Electro/2 Extended Brackets. See Illustration: B, D
7	Contact Factory.

BRACKET DIMENSION KEY


For additional information regarding bracket selection, see Section 10: Engineering Standards.




A. 3-1/2" (89mm)



B.  7"
(178mm)




C. 4-7/8" (124mm)
Optional fascia



D. 7-1/4" (184mm)
Optional fascia

ELECTRO/2 EXTENDED DRIVE-END BRACKET



E.


7mm

3-3/4" (95mm)

Optional Fascia


ELECTRO/3

DRIVE-END BRACKET



4-3/8"
(111mm)

**ELECTRO/3 POCKET
DRIVE-END BRACKET**



4-7/8"
(124 mm)

Optional
Fascia

**ELECTRO/3 EXTENDED
DRIVE-END BRACKET**

MechoShade Systems, Inc.

42-03 35th Street, Long Island City, NY 11101

Telephone: 718-729-2020

Fax: 718-729-2941 / 800-899-8081

E-mail: info@mechoshade.com
Internet Web Site: www.mechoshade.com